BIDDING DOCUMENTS

PROJECT: BURGESS RD/DAY RD

INTERSECTION IMPROVEMENT

PROJECT #: W66013

BID OPENING: JUNE 27, 2018

COMPLETION DATE: DECEMBER 31, 2018

CONTRACTING AGENCY:



61150 SE 27TH STREET BEND, OREGON 97702 PHONE: (541) 388-6581 FAX: (541) 388-2719

WEB: www.deschutes.org/road



BIDDING DOCUMENTS BURGESS RD/DAY RD INTERSECTION IMPROVEMENTS

TABLE OF CONTENTS

INVITATION TO BID	A1
INFORMATION FOR BIDDERS	A2
BID PROPOSAL FORM	B1
SCHEDULE OF BID ITEMS	B3
SUBCONTRACTOR DISCLOSURE FORM	B4
BID GUARANTY FORM	B5
CONTRACT AGREEMENT FORM (FOR INFORMATION ONLY)	C1
PERFORMANCE BOND FORM (FOR INFORMATION ONLY)	C3
PAYMENT BOND FORM (FOR INFORMATION ONLY)	C5
SPECIAL PROVISIONS	SP1

DESCRIPTION OF PARTS OF BIDDING DOCUMENTS WHICH ARE NOT BOUND HEREIN:

PROJECT PLANS, TITLED "BURGESS RD/DAY RD INTERSECTION IMPROVEMENT PROJECT"

OREGON STANDARD SPECIFICATIONS FOR CONSTRUCTION, 2018

The Specification that is applicable to the Work on this Project is the 2018 edition of the "Oregon Standard Specifications for Construction". All number references in these Special Provisions shall be understood to refer to the Sections and subsections of the Standard Specifications bearing like numbers and to Sections and subsections contained in these Special Provisions in their entirety.

DESCHUTES COUNTY, OREGON ROAD DEPARTMENT INVITATION TO BID

BURGESS RD/DAY RD INTERSECTION IMPROVEMENT

Sealed bids will be received at the Deschutes County Road Department, 61150 SE 27th Street, Bend, Oregon 97702, until but not after, **2:00 p.m. on June 27, 2018**, at which time and place all bids for the above-entitled public works project will be publicly opened and read aloud.

The Class of Work of this Project is Earthwork and Drainage. The value for this Contract is estimated to be between \$500,000 and \$1,000,000. The Work will consists of, but not be limited to, the following:

- Install and maintain temporary traffic control.
- Reconstruction and realignment of Day Road and Pine Forest Road.
- Widening and overlaying of Burgess Road.
- Installation of junction boxes and conduit for future signal at the intersection of Burgess/Day Roads.
- Perform additional and incidental work as called for by the specifications and plans.

Specifications and other bid documents may be inspected and obtained from the Deschutes County Bids and RFPs website at http://www.deschutes.org/rfps. Inquiries pertaining to these specifications shall be directed to Cody Smith, County Engineer, in writing at Cody.Smith@deschutes.org or the address above.

Bids shall be made on the forms furnished by the County, including a Bid Bond or Cashiers Check for the minimum amount of 10% of the Bid Price, addressed and mailed or delivered to Chris Doty, Department Director, 61150 SE 27th Street, Bend, Oregon 97702 in a sealed envelope plainly marked "BID FOR BURGESS RD/DAY RD INTERSECTION IMPROVEMENT" and the name and address of the bidder.

Bidders must submit a Subcontractor Disclosure Statement. The subcontractor disclosure statement may be submitted in the sealed bid prior to 2:00 p.m. on June 27, 2018 or in a separate sealed envelope marked "SUBCONTRACTOR DISCLOSURE STATEMENT - BURGESS RD/DAY RD INTERSECTION IMPROVEMENT" prior to 4:00 p.m. on June 27, 2018 at the above location.

Because the work called for under this contract is for a public works project subject to state prevailing rates of wage under ORS 279C.800 to 279C.870, the County will not receive or consider a bid unless the bid contains a statement by the bidder that the bidder will comply with ORS 279C.840. Each bid must contain a statement as to whether the bidder is a resident bidder, as defined in ORS 279A.120. Vendors shall use recyclable products to the maximum extent economically feasible in the performance of the contract work set forth in this document.

Bidders shall be prequalified with the State of Oregon for the Class of Work stated above in accordance with ORS 279C.430 through 279C.450 and Deschutes County Code 12.52.020 The successful bidders and subcontractors providing labor shall maintain a qualified drug testing program for the duration of the contract. Bidders shall be licensed with the Construction Contractor's Board. Contractors and subcontractors need not be licensed under ORS 468A.720.

Deschutes County may reject any bid not in compliance with all prescribed bidding procedures and requirements, and may reject for good cause any or all bids upon a finding of Deschutes County it is in the public interest to do so. The protest period for this procurement is seven (7) calendar days.

CHRIS DOTY
Road Department Director

PUBLISHED:

DAILY JOURNAL OF COMMERCE: June 6, 2018

THE BEND BULLETIN: June 6, 2018

INFORMATION FOR BIDDERS

- 1. <u>General Description of Project.</u> A general description of the work to be performed is contained in the Invitation to Bid. The scope is indicated in the applicable parts of these Contract documents.
- 2. <u>Contract Documents.</u> The Contract documents under which it is proposed to execute the work consist of the material bound herewith. These Contract documents are intended to be mutually complementary and to provide all details reasonably required for the execution of the proposed work.

Any person contemplating the submission of a proposal and being in doubt as to the meaning or intent of said contract document shall at once notify, in writing, the Road Department Director of Deschutes County, Oregon. Any interpretation of change will be mailed or delivered to each person receiving a set of documents.

- **3. Form of Proposals.** All proposals must be submitted on the forms furnished. Subcontractor disclosure form may be submitted with the bid or in a separate envelope.
- 4. <u>Substitutions.</u> Materials and/or products called for in the specifications are named in order to establish a standard of quality design. Manufacturers or suppliers of products similar to those specified may submit bids on the work providing requests for approval of substitution materials are made at least seven (7) calendar days prior to the bid opening. Adequate information on which to base approval or disapproval must be furnished to the Road Department Director or his representative and the Road Department Director shall be the sole judge of any request. When the Road Department Director approves a substitution, it is with the understanding that the Contractor guarantees the substituted article or materials to be equal or better than the specified.
- **Preparation of Proposals.** All blank spaces in the proposal form must be filled in, in ink, or typed, in both words and figures where required. No changes shall be made in phraseology of the forms. Written amount shall govern in cases of discrepancy between the amount stated in writing and amount stated in figures.

Any proposal shall be deemed informal which contains omissions, erasures, alterations, or additions of any kind, or prices uncalled for, or which, in any manner shall fail to conform to the conditions of the published invitation to bidders.

The bidder shall sign his proposal in the blank space provided therefore. Proposals made by corporations or partnerships shall contain names and addresses of the principal officers or partners therein. If a corporation makes a proposal, it must be signed by one of the principal officers thereof, and the corporate seal affixed.

If made by a partnership, it must be signed by one of the partners, clearly indicating that he is signing as a partner of the firm. In the case of a proposal

made by a joint venture, each of the joint venturers must sign the proposal in his personal capacity.

The wording of the proposal shall not be changed. Any additions, conditions, limitations or provisions inserted by the bidder will render the proposal irregular and may cause its rejection.

6. <u>Submission of Proposals.</u> All proposals must be submitted in the time and place and in the manner prescribed in the invitation to bid. Proposals must be made on the prescribed proposal forms furnished. Each proposal must be submitted in a sealed envelope, so marked as to indicate its contents without being opened. If the proposal is submitted by mail, the sealed envelope containing the bid must be enclosed in a separate envelope plainly addressed for mailing to conformance with instructions in the Invitation to Bid

A responsive bid proposal must include the following completed items:

- Bid Proposal Form
- Schedule of Bid Items
- Bid Guaranty Form
- 7. Modification or Withdrawal of Proposal. Any bidder may modify his bid by written or telegraphic communication at any time prior to the scheduled closing time for receipt of bids, provided such communication is received by the County prior to the closing time, and provided further that a written confirmation of a telegraphic modification over the signature of the bidder was mailed prior to the closing time. If written confirmation of a telegraphic communication is not received within at least two calendar days of the closing time, no consideration will be given to the modification. The written or telegraphic communication should not reveal the bid price, but should state the addition or subtraction or other modification so that the County will not know the final prices or terms until the sealed bid is opened.

Proposals may be withdrawn prior to the scheduled time for the opening of the proposals either by telegraphic or written request, or in person. No proposal may be withdrawn after the time scheduled for opening of proposals, unless the County has failed to comply with the time limits applicable to award of the Contract.

- Disclosure of First Tier Subcontractors. 8. Bidders must submit a subcontractor disclosure statement where the value, estimated by the contracting Agency exceeds \$100,000. The subcontractor disclosure statement may be submitted in the sealed bid prior to the bid closing OR it be submitted in separate sealed envelope mav а "SUBCONTRACTOR DISCLOSURE STATEMENT" and the name of the project, within two (2) working hours after the bid closing. Bidder must submit a statement on the form provided in these contract documents identifying all first-tier subcontractors that will furnish labor or labor and materials and whose contract value is equal to or greater than:
 - 5% of the total project bid, but at least \$15,000, or
 - \$350,000 regardless of the percentage of the total project bid.

For each subcontractor listed, include:

- The name, address and telephone number of the subcontractor:
- The category of work that the subcontractor would be performing.

If no subcontracts subject to the above disclosure requirements are anticipated, a bidder is required to indicate "NONE" on the accompanying form.

To determine disclosure requirements, it is required that bidders disclose subcontract information for any subcontractor as follows:

1) Use the forms bound herewith for the required disclosure.

Notice – Bidder's Requirements: Bidders are required to disclose information about certain first-tier subcontractors when the contract value estimated by the contracting Agency for a Public Improvement is greater than \$100,000 (see ORS 279C.370). Specifically, when the contract amount of a first-tier subcontractor furnishing labor or labor and materials would be greater than or equal to: (i) 5% of the project bid, but at least \$15,000, or

- (ii) \$350,000 regardless of the percentage, the bidder must disclose the following information about that subcontract either in its Bid submission or within two working hours after bid closing:
- (a) The subcontractor's name, and
- (b) The category of work that the subcontractor would be performing.
- 2) If the bidder will not be using any subcontractors that are subject to the above disclosure requirements, the bidder is required to indicate "NONE" on the accompanying form.
- 3) Bidder shall submit the disclosure form required by OAR 137-049-0360 either in its bid submission or separately within two working hours after Bid Closing in the manner specified by the invitation to bid.
- 4) Compliance with the disclosure and submittal requirements of ORS 279C.370 and OAR 137-049-0360 is a matter of Responsiveness. Bids which are submitted by Bid Closing, but for which the disclosure submittal has not been made by the specified deadline, are not responsive and shall not be considered for Contract award.
- 5) County shall obtain, and make available for public inspection, the disclosure forms required by ORS 279C.370 and OAR 137-049-0360. County shall also provide copies of disclosure forms to the Bureau of Labor and Industries as required by ORS 279C.835. County is not required to determine the accuracy or completeness of the information provided on disclosure forms.
- 6) Substitution of affected first-tier subcontractors shall be made only in accordance with ORS 279C.585. County shall accept written submissions filed under the statute as public records. Aside from issues involving inadvertent clerical error under ORS 279.585(5), County does not have a statutory role or duty to review, approve, or resolve disputes

concerning such substitutions. See ORS 279C.590 regarding complaints to the Construction Contractors Board on improper substitution.

THE COUNTY MUST REJECT A BID IF THE BIDDER FAILS TO SUBMIT THE DISCLOSURE FORM WITH THIS INFORMATION BY THE STATED DEADLINE (see OAR 137-049-0360).

- 9. <u>Bid Security.</u> The Bid Bond or Cashier's Check will be for a minimum of ten per cent (10%) of the amount of the bid price. If a bidder bids more than one bid proposal, each proposal must be accompanied by separate bid security. The County reserves the right to retain the bid security of the three (3) lowest bidders until the successful bidder has signed and delivered the contract and furnished one hundred percent (100%) Performance and Payment Bonds.
- 10. Conditions of Work. Each bidder must inform himself of the conditions relating to the execution of the work, and make himself thoroughly familiar with all the Contract documents. Failure to do so will not relieve the successful bidder of his obligations to enter into a Contract and complete the contemplated work in strict accordance with the Contract documents. Each bidder must inform himself on all laws and statutes, both Federal and State, relative to the regular execution of the work, the employment of labor, protection of public health, access to the work and similar requirements.
- 11. <u>Award of Contract</u>. The award of the contract will be made by the County on the basis of the proposal which in its sole and absolute judgment will best serve the interest of the County.

County will issue a notice of intent to award contract. Any bidder may protest the notice of intent to award contract within seven (7) calendar days of the notice of intent to award contract.

The County reserves the right to accept or reject any or all proposals, and to waive any informalities and irregularities in said proposals.

12. Payment and Retainage. Payment for work performed will be made by the County as specified in the Special Provisions based upon the contract unit prices on the Bid Schedule.

Upon substantial completion of the contract, Contractor may request a partial release of retainage held by the County. The maximum amount of a request for a partial release retainage shall be the Contract amount less 150 percent of the estimated cost of the Contract yet to be performed through final completion. Upon final completion, Contractor may request release of the remaining retainage. Each request for the release of retainage shall be accompanied by the Consent of the contractor's surety.

13. Performance Bond and Payment Bond. The successful bidder shall file with the County, at the time of execution of the contract, a Performance Bond and a Payment Bond each of not less than the contract price on the forms furnished by the County. The Surety Company furnishing the required bonds shall have a sound financial standing and a record of service satisfactory to the County, and shall be authorized to do business in the

State of Oregon. In lieu of a Performance Bond, the contractor may file cash, a Certified or Cashier's Check made payable to Deschutes County, Oregon. This money, check or certificate will be held by the County conditioned on and subject to the same provisions as set forth in the attached Performance Bond. ORS 279C.380 allows no flexibility for a cash deposit in lieu of a Payment Bond.

County may request a copy of Contractor's surety bond(s). Contractor must supply County with copy of surety bond(s) within ten (10) calendar days from the date of the request.

- 14. Required Public Works Bond. Before starting work on this project the Contractor and every subcontractor to which Contractor is a party for the performance of work under this contract must have a public works bond filed with the Construction Contractors Board, 700 Summer St. NE, Suite 300, Salem, Oregon 97309-5052, before starting work on the project, unless exempt under section 2 (7) or (8) of 2005 Oregon Laws Chapter 360 ORS 279C.836(7) or (8). Every subcontract to which Contractor is a party for the performance of work under this contract shall contain a provision requiring the subcontractor to have a public works bond filed with the Construction Contractors Board before starting work on this project, unless exempt under ORS 279C.836 (7) or (8) section 2 (7) or (8) of 2005 Oregon Laws Chapter 360.
- **Failure to Execute Contract.** Upon failure by the successful bidder to enter into the Contract and furnish the necessary bond within ten (10) calendar days from the date Notice of Award is made, the bid bond accompanying the bid shall be forfeited, the proceeds paid to the County, and the award withdrawn. The award may then be made to the next lowest responsible bidder, or all bids rejected and the work is re-advertised.
- 16. <u>Disclaimer of Responsibility.</u> Neither the County nor the Road Department Director will be responsible for oral interpretations. Should a bidder find discrepancies in, or omissions from the drawings, specifications, or other pre-bid documents, or be in doubt as to their meaning, he shall notify the County at least seven (7) calendar working days prior to the bid opening date. Any and all such interpretations, any supplemental instructions or approval of manufacturer's materials to be substituted will be made only in the form of written addenda to the specifications, which, if issued, will be hand delivered or sent by regular mail, email and fax to all prospective bidders receiving a set of such documents, not later than two (2) calendar days prior to the date fixed for the opening of bids. Failure of any bidder to receive any such addendum or interpretation shall not relieve such bidder from any obligation under his bid as submitted. All addenda so issued are to be covered in the bid for such addenda to become part of the Agreement.
 - 17. Permits and Licenses. The successful bidder shall be required to have or obtain, at his expense, any and all permits and licenses required by Deschutes County, any City within the County, and the State of Oregon, pertaining to the service he proposes to furnish. Licensing shall include without limitation registration with Construction Contractors Board and in the case of professional engineers and architects proof of current licensing with the appropriate State licensing board.

- **18.** Minimum Requirements of Bid. The following minimum requirements as to the form and manner of submitting bids must be strictly observed; variance from these requirements will result in rejection of the bid as unresponsive.
 - a. Each Bid must be submitted on forms furnished by the County, and include a complete set of contract documents.
 - b. Each Bid must be signed by the bidder.
 - c. Bid security, in the required form and amount, must accompany each bid.
 - d. Each blank in the proposal must be filled in unless an alternative is provided. Each separate bid item must be bid on, unless the proposal form clearly indicates otherwise.
 - e. Each Bid must be submitted in a separate sealed envelope, marked to identify without opening, and in the hands of the Road Department Director at the time and place specified for bid opening.
 - f. A proposal containing modifications, deletions, exceptions or reservations which in any way conflict with or purport to alter any substantive provision contained in the bid documents, will not be considered.
 - g. A conditional bid will not be considered.
 - h. Any bid submitted without all of the pages of the bid documents, but with a sufficient number of the pages of the bid documents to allow the evaluation of the bid, shall be deemed to have been submitted with the missing pages for purposes of bid evaluation. The missing pages of the bid documents shall be deemed to be incorporated into bid by reference.
- **19.** Plans. Plans are not to be taken or construed as being reproduced at precisely the indicated scale. Where the plans are photographic reductions of the original tracings, the approximate amount of reduction is indicated by a note on the plans.
- **20. Specifications.** The specifications are the minimum acceptable specifications for the project for which proposals are sought. Any deviation from the specifications contained herein, shall render the bid non-responsive.
- 21. Examination of Site and Conditions. Bidders are required, prior to submission of bids, to carefully examine the site and the Plans and Specifications of the contemplated work. Errors and omissions in the Plans or Specifications shall be called to the attention of the Road Department Director prior to submission of bid so that addenda may be issued. Failure to do so on the part of the Contractor does not relieve him of responsibility for a correct and completely finished job. Only a written interpretation or correction by addendum shall be binding.

22. Pre-Bid Inquiries. Bidders with pre-bid inquires shall contact Cody Smith, County Engineer, in writing at cody.smith@deschutes.org or 61150 SE 27th Street, Bend, Oregon 97702.

23. Prequalification of Bidders.

Bidders shall be pre-qualified with the State of Oregon in accordance with ORS 279C.430 and Deschutes County Code 12.52.020. The prequalification class is as shown in the Invitation to Bid. This contract is subject to ORS 279C.800 to 279C.870. The prequalification classification required for this project is "(ACP) Asphalt Concrete Paving and Oiling". The successful bidders and subcontractors providing labor shall maintain a qualified drug-testing program for the duration of the contract. Bidders shall be licensed with the Construction Contractor's Board. Contractors and subcontractors need not be licensed under ORS 468.710.

- **24.** Contract Award. Deschutes County reserves the right to postpone award of the contract for fourteen (14) calendar days from the date of the bid opening, or until a final decision is made on a protest, whichever is later.
- **25.** <u>Bidder Statement.</u> Submission of a bid for the project shall constitute a statement by the bidder that the provisions of ORS 279C.840 are to be complied with.

BID PROPOSAL FORM

BURGESS RD/DAY RD INTERSECTION IMPROVEMENTS

DIDDED MANE			000,"	
BIDDER NAME			CCB#	
ADDRESS	CITY	STATE	ZIP CODE	
CONTACT NAME	CONTACT PHONE N	IUMBER	CONTACT EMAIL ADDRE	ESS
The undersigned, hereinaft in this Proposal are those n and it is made without collu County; and that the Propo another proposal on this co	amed herein; that this Prosion with any official of Desal is made without any co	oposal is, in all r eschutes County	espects, fair and without f y, Oregon, hereinafter call	raud; ed
The Bidder further declares is satisfied as to the quantit involved; and that this prop contract documents, which	ies involved, including ma osal is made according to	nterials and equi the provisions	pment, and conditions of and under the terms of the	work
The Bidder agrees that all o (ORS Chapter 279) are, by hereby states that Bidder w	this reference, incorporat	ed in and made		
Bidder declares that (check ☐ Bidder is a resident bidd ☐ Bidder is a nonresident b	er of the State of Oregon.			
Bidder declares that Bidder	is not in violation of any t	ax laws of the S	State of Oregon and Desch	nutes

The Bidder further agrees that if this Proposal is accepted, Bidder will, within ten (10) calendar days after notification of acceptance, execute the contract with the County in the form of contract annexed hereto; and will, at the time of execution of the contract, deliver to the County the Performance and Payment Bonds (See Section 13 Information for Bidders) required herein; and will, to the extent of this Proposal, furnish all materials necessary to complete the work in the manner, in the time, and according to the methods as specified in the contract documents and required by the Road Department Director.

County, including but not limited to those programs listed in ORS 305.380(4),

Bidder certifies that it has a drug testing program in place for its employees, or warrants that a drug testing program will be in place prior to execution of this contract, that the drug testing program is in writing, that new employees must pass a drug screening, that existing employees may be tested for reasonable cause or when an employee is injured or involved in an accident resulting in property

damage. Bidder agrees that each subcontractor providing labor under this Contract shall maintain a qualifying drug testing program for the duration of the Contract.

The Bidder agrees to commence work upon the issuance of a "Notice to Proceed" by the County and fully complete the project according to the time schedule specially set forth in the contract documents.

Bidder further agrees to pay liquidated damages for failure to complete within the specified time.

It is agreed that if the Bidder is awarded the contract for the work herein proposed and shall fail or refuse to execute the contract and furnish the contract and furnish the specified Performance and Payment Bond within ten (10) calendar days after receipt of notification of acceptance of Bidder's proposal, then, in that event, the bid security deposited herewith according to the conditions of the Invitation to Bid and Information for Bidders shall be retained by the County as liquidated damages; and it is agreed that the said sum is a fair measure of the amount of damage the County will sustain in case the Bidder shall fail or refuse to enter into the contract for the said work and to furnish the Performance and Payment Bonds (See Section 13 Information for Bidders) as specified in the contract documents. Bid security in the form of a certified check shall be subject to the same requirements as a bond.

(IF SOLE PROPRIETOR OR PARTNERSHIP)

(SCHEDULE OF BID ITEMS TO FOLLOW)

ITEM	SPEC	ITEM	UNIT	QTY	UNIT PRICE	AMOUNT
NO.	SECTION					
		Part 00200 - Temporary Features and Appurtenances				
001	00210	Mobilization	LS	1	<u>\$</u>	\$
002	00215	Temporary Work Zone Traffic Control, Complete	LS	1	\$	\$
002	00223	Temporary Type 2 Fence	FT	•	\$	
004	00270	Erosion Control	LS	1	<u>\$</u>	\$
004	00200		LO		<u>.x</u>	<u> </u>
		Part 00300 - Roadwork			_	_
005	00305	Construction Survey Work	LS	1	<u>\$</u>	•
006	00310	Removal of Structures and Obstructions	LS	1	<u>\$</u>	-
007	00310	Asphalt Pavement Saw Cutting	FT	2,422		<u>\$</u>
800	00320	Clearing and Grubbing	LS	1	<u>\$</u>	<u>\$</u>
009	00330	General Excavation	CY	2,900	<u>\$</u>	<u>\$</u>
		Part 00600 - Bases				
010	00620	Cold Plane Pavement Removal, 0 - 2 Inches Deep	SY	2,481	<u>\$</u>	<u>\$</u>
011	00641	Aggregate Base	Ton	3,752	<u>\$</u>	<u>\$</u>
012	00641	Aggregate Shoulders	Ton	376	<u>\$</u>	<u>\$</u>
		Part 00700 - Wearing Surfaces				
013	00744	Level 3, 1/2 inch Dense ACP Mixture	Ton	2,091	<u>\$</u>	<u>\$</u>
014	00749	Extra for Asphalt Approaches	EA	19		•
015	00759	Concrete Islands	SF	828	\$	
		Part 00800 - Permanent Traffic Safety and Guidance	Devices			
016	00860	Longitudinal Pavement Markings - Paint	FT	12,195	\$	<u>\$</u>
017	00867	Pavement Legend, Type B: Arrows	EA	20		
017	00867	Pavement Legend, Type B: Arrows	EA	20		· · ·
018	00867	Pavement Bar, Type B	SF	94		\$
		Part 00900 - Permanent Traffic Control and Illumination	on System	ns	\$	\$
019	00905	Remove Existing Signs	LS	<u>.s</u> 1	<u>\$</u>	\$ \$
020	00905	Remove and Reinstall Existing Signs	LS	1	<u>\$</u>	\$
021	00920	Sign Support Footings	LS	1	\$	\$
022	00930	Perforated Steel Square Tube Anchor Sign Supports	LS	1	\$	\$
023	00940	Type "R" Signs in Place	SF	27		\$
024	00940	Type "W1" Signs in Place	SF	36		\$
025	00940	Type "G" Signs in Place	SF	18		\$
026	00940	Type "Y1" Signs in Place	SF	39		\$ \$
027	00990	Traffic Signal Installation	LS	1	\$	\$
0	00000	-	_0	·	<u> </u>	. *
028	01070	Part 01000 - Right of Way Development and Control	EA	4	¢	¢
		Single Mailbox Support			<u>\$</u>	<u>\$</u> \$
029	01070	Multiple Mailbox Support	EΑ		\$	<u>\$</u> \$
030	01070	Mailbox Concrete Collar	EA		<u>\$</u>	
031	01012	Water Quality Swale	LS	1	<u>\$</u>	<u>\$</u>

BURGESS RD/DAY RD INTERSECTION IMPROVEMENT DESCHUTES COUNTY, OREGON

SCHEDULE OF BID ITEMS

NO.	SPEC SECTION		ITEM	UNI	т дту	UNIT PRICE	AMOUNT
032	01014	Water Quality Filter Stri	р	LS	1	<u>\$</u>	<u>\$</u>
						TOTAL BID:	
FOR DE	SCHUTES C	OUNTY USE ONLY		ADD	% FOR NON-RE	SIDENT BIDDER	
						TOTAL BID	
The Bio	dder ackno	wledges receipt of the	following Adder	nda: (insert adde	enda numbers)		
No	_ No	No No	No No.	No	No		

FIRST-TIER SUBCONTRACTOR DISCLOSURE FORM

Project Name: BURGESS RD/DAY RD INTERSECTION IMPROVEMENT Bid #: W66013 Bid Closing Date: JUNE 27, 2018 Time: 2:00 P.M. Name of Bidding Contractor: _____ This form must be submitted at the location specified in the Invitation to Bid on the advertised bid closing date and within two working hours (4:00 p.m.) after the advertised bid closing time. List below the name of each subcontractor that will be furnishing labor or materials and that is required to be disclosed, the category of work that the subcontractor will be performing and the dollar value of the subcontract. Enter "NONE" if there are no subcontractors that need to be disclosed. (ATTACH ADDITIONAL SHEETS IF NEEDED). NAME DOLLAR VALUE CATEGORY OF WORK 1) ______ 2) ______ \$_____ 3) ______ \$_____ 4) ______ \$_____ 5) ______ \$_____ 6) ______ 7) ______ \$_____ 8) ______ \$_______ Failure to submit this form by the disclosure deadline will result in a non-responsive bid. A nonresponsive bid will not be considered for award. Form submitted by Bidder name: Contact name: _____ Phone number: _____

BID BOND

KNOW ALL MEN BY THESE PRESENTS	S, That
hereinafter called the Principal, and	
a corporation duly organized under the la	ws of the State of,
having its principal place of business at _	
	, in the State of,
and authorized to do business in the State	e of Oregon, as Surety, are held and firmly bound unto the
County of Deschutes, hereinafter called th	ne Obligee, in the penal sum of
	DOLLARS (\$),
	ly to be made, we bind ourselves, our heirs, executors, ointly and severally, firmly by these presents.
The condition of this Bond is that, wherea Rd/Day Rd Intersection Improvement pro	as, the Principal is submitting a bid proposal for the Burgess ject hereby made a part hereof;
contract be awarded to said Principal, ar and shall furnish the Performance and documents with the time fixed by said of	posal submitted by the said principal be accepted, and the and if the said Principal shall execute the proposed contract Payment Bond as required by the bidding and contract documents, then this obligation shall be void, otherwise to d sealed this day of, 2018.
SURETY:	CONTRACTOR:
Name	Name
By:	By:
Title:	Title:

CONTRACT

FOR

BURGESS RD/DAY RD INTERSECTION IMPROVEMENT

THIS	CONTRAC	T is	made	and	entered	into,	in	duplicate,	by and	d be	tweer
DESC	HUTES CO	UNTY	/, a po	litical	subdivisi	on of	the	State of C	Dregon,	here	inafte
called	"County"	and	·					,	hereinal	ter	called
"Contr	actor."										

WITNESSTH:

THAT the said Contractor, in consideration of the sums to be paid by the County in the manner and at the times herein provided, and in consideration of the other covenants and agreements herein contained, hereby agrees to perform and complete the work herein described and provided for, and to furnish all necessary things in accordance with the applicable contract documents, bound herewith, and in accordance with such alterations or modifications of the same as may be made by the County, and according to and within the meaning and purpose of this contract. This Agreement shall be binding upon the heirs, executors, administrators, successors and assigns of the Contractor.

THAT the Contract Documents, consisting of Invitation to Bid, Information for Bidders, Special Provisions, Schedule of Items, Award, Subcontractor Disclosure, Contract, Performance Bond, Payment Bond, Certificate of Insurance, Prevailing Wage Rates, Oregon Standard Specifications, Project Plans and Standard Drawings bound or referenced herewith are hereby specifically referred to and by this reference made a part hereof, and shall, by such reference have the same force and effect as though all of the same were fully written or inserted herein.

THAT the Contractor shall faithfully complete and perform all of the obligations of this Contract, and in particular, shall promptly, as due, make payment of all just debts, dues, demands and obligations incurred in the performance of said Contract; and shall not permit any lien or claim to be filed or prosecuted against the County, its agents or employees. It is expressly understood that this Contract in all things shall be governed by the laws of the State of Oregon, and the Ordinances of the County.

THAT in consideration of the faithful performance of all of the obligations, general and special, herein set out, and in consideration of the faithful performance of the work as set forth in the Contract Documents in accordance with the directions of the Road Department Director and the Director's satisfaction, the County agrees to pay to the said Contractor the amount earned, as determined from the quantities of work performed, and taking into consideration any amounts that may be deductible and under the terms of the Contract, and to make such payments in the manner and at the times provided in the applicable provisions, and schedule of contract prices.

(SIGNATURE PAGE TO FOLLOW)

signed in its name, by its Board of Recording Secretary; and the said (County Commissioners, duly attested by its Contractor has caused this Agreement to be day of, 2018.
CONTRACTOR	BOARD OF COUNTY COMMISSIONERS OF DESCHUTES COUNTY, OREGON
BY:	ANTHONY DEBONE, CHAIR
TITLE:	PHILLIP G. HENDERSON, VICE CHAIR
	TAMMY BANEY, COMMISSIONER
	ATTEST:
	RECORDING SECRETARY
	APPROVED AS TO CONTENT:
	ROAD DEPARTMENT DIRECTOR
	APPROVED AS TO FORM:
	COUNTY LEGAL COUNSEL

Bond #	<u>!</u>

PERFORMANCE BOND

KNOW ALL MEN BY THESE PRESENTS: that	
(Name of Contractor)	
(Address of Contractor)	
a	, hereinafter called
a(Corporation, Partnership, or Individual)	
"Principal", and	
(Name of Surety) hereinafter called "Surety", are held and firmly bound unto Deschutes Cou	unty, Oregon
hereinafter called "Owner", in the penal sum of	
	()
in lawful money of the United States, for the payment of which sum well a we bind ourselves, successors, and assigns, jointly and severally, firmly be	
THE CONDITION OF THIS OBLIGATION is such that whereas, the Prince certain contract with the OWNER, dated the day of which is hereto attached and made a part hereof for the construction of:	

Burgess Rd/Day Rd Intersection Improvement

NOW THEREFORE, if Principal shall well, truly and faithfully perform its duties, all the undertakings, covenants, terms, conditions, and agreements of said contract during the original term thereof, and any extensions thereof which may be granted by Owner, with or without notice to Surety and during the **two year guaranty period**, and if Principal shall satisfy all claims and demands incurred under such contract, and shall fully indemnify and save harmless Owner from all costs and damages which is may suffer by reason of failure to do so, and shall reimburse and repay Owner all outlay and expense which Owner may incur in making good any default, then this obligation shall be void; otherwise to remain in full force and effect.

PROVIDED FURTHER, that Surety, for value received hereby stipulates and agrees that no change, extension of time, alteration or addition to the terms of the contract or to work to be performed thereunder or the specifications accompanying the same shall in any wise affect its obligation on this bond, and it does hereby waive notice of any such change, extension of time, alteration or addition to the terms of the contract or to the work or the specifications.

PROVIDED, FURTHER, that no final settlement between Owner and Principal shall abridge the right of any beneficiary hereunder, whose claim may be unsatisfied.

IN WITNESS WHEREOF, this instrumer shall be deemed an original, this the						
(SEAL)	PRINCIPAL: _					
	By Signature					
	Official Capac	ity				
	Attest: Corpor	ation Secretary				
(SEAL)	SURETY:[Add signatures f		ing multiple bonds]			
	BY ATTORNE [Power-of-Attorne		/ each surety bond			
	Name					
	Signature					
	Address					
	City	State	Zip			
	Phone	Fax				

NOTE: Date of bond must not be prior to date of Contract.

If Contractor is Partnership, all partners should execute bond.

Bond	#

PAYMENT BOND

KNOW ALL MEN BY THESE PRESENTS: that	
(Name of Contractor)	
(Address of Contractor)	
a	, hereinafter called
a(Corporation, Partnership, or Individual)	
"Principal", and	
(Name of Surety) hereinafter called "Surety", are held and firmly bound unto Deschutes Cou	unty, Oregon
hereinafter called "Owner", in the penal sum of	
Dollars, \$	
in lawful money of the United States, for the payment of which sum well a we bind ourselves, successors, and assigns, jointly and severally, firmly be	
THE CONDITION OF THIS OBLIGATION is such that whereas, the Princ certain contract with the OWNER, dated the day of which is hereto attached and made a part hereof for the construction of:	

Burgess Rd/Day Rd Intersection Improvement

NOW, THEREFORE, if Principal shall promptly make payment to all persons, firms, subcontractors, and corporations furnishing materials for or performing labor in the prosecution of the work provided for in such contract, and any authorized or modification thereof, including all amounts due for materials, lubricants, oil, gasoline, coal and coke, repairs on machinery, equipment and tools, consumed or used in connection with the construction of such work, and all insurance premiums on said work, and for all labor, performed in such work whether by subcontractor or otherwise, then this obligation shall be void; otherwise to remain in full force and effect.

PROVIDED, FURTHER, that Surety for value received hereby stipulates and agrees that no change, extension of time, alteration or addition to the terms of the contract or to the work to be performed thereunder or the specifications accompanying the same shall in any wise affect its obligation on this bond, and it does hereby waive notice of any such change, extension of time, alteration or addition to the terms of the contract or to the work or to the specifications.

PROVIDED, FURTHER, that no final settlement between Owner and Principal shall abridge the right of any beneficiary hereunder, whose claim may be unsatisfied.

IN WITNESS WHEREOF, this instrumer shall be deemed an original, this the			
(SEAL)	PRINCIPAL:		
	By Signature		
	Official Capac	city	
	Attest:	ration Secretary	
(SEAL)	SURETY: [Add signatures		sing multiple bondsj
	BY ATTORNE [Power-of-Attorn		y each surety bond
	Name		
	Signature		
	Address		
	City	State	Zip
	Phone	Fax	

NOTE: Date of bond must not be prior to date of Contract.
If Contractor is Partnership, all partners should execute bond.

SPECIAL PROVISIONS

PROJECT: **BURGESS RD/DAY RD INTERSECTION IMPROVEMENTS**

PROJECT #: W66013


CONTRACTING AGENCY:



61150 SE 27TH STREET BEND, OREGON 97702

WEB: www.deschutes.org/road


PROFESSIONAL OF RECORD CERTIFICATION:

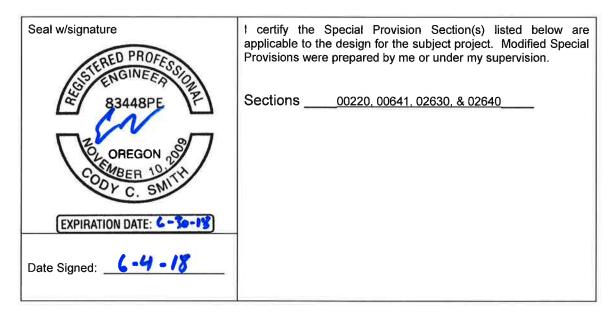

DESCHUTES COUNTY ROAD DEPARTMENT 61150 SE 27TH STREET BEND, OREGON 97702

SPECIAL PROVISIONS

THE CONSTRUCTION OF THE BURGESS/DAY INTERSECTION IMPROVEMENT PROJECT

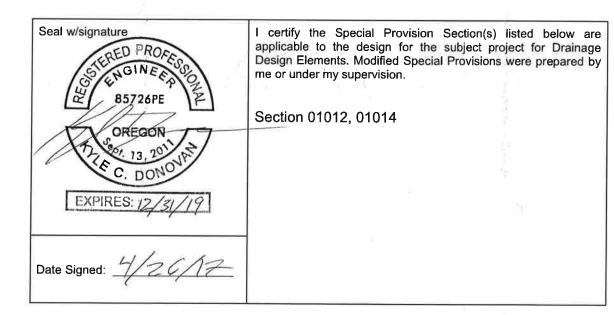

DESCHUTES COUNTY ROAD DEPARTMENT 61150 SE 27TH STREET BEND, OREGON 97702

SPECIAL PROVISIONS

THE CONSTRUCTION OF THE BURGESS/DAY INTERSECTION IMPROVEMENT PROJECT

Seal w/signature

PED PROFESSOR

58977PE

58977PE

OREGON BO

RENEWAL DATE: Junc 2018

Date Signed: <u>19-17-18</u>

I certify the Special Provision Section(s) listed below are applicable to the design for the subject project for Roadway, Signing and Striping Design Elements. Modified Special Provisions were prepared by me or under my supervision.

Section 00210, 00225, 00270, 00305, 00310, 00320, 00330, 00440, 00620, 00640, 00744, 00749, 00850, 00860, 00867, 00920, 00930, 00940, 01070

DESCHUTES COUNTY ROAD DEPARTMENT 61150 SE 27TH STREET BEND, OREGON 97702

SPECIAL PROVISIONS

THE CONSTRUCTION OF THE BURGESS/DAY INTERSECTION IMPROVEMENT PROJECT

I certify the Special Provision Section(s) listed below are applicable to the design for the subject project for Traffic Design Elements. Modified Special Provisions were prepared by me or

Seal w/signature

PROFESSO

OFFICE T. SNUTTE T

Section 00990

under my supervision.

Date Signed: 4/20/20/8

SPECIAL PROVISIONS

WORK TO BE DONE

The work to be done under this contract consists of the following on the Burgess Rd/Day Rd Intersection Improvement project:

- 1. Install and maintain temporary traffic control.
- 2. Reconstruction and realignment of Day Road and Pine Forest Road.
- 3. Widening and overlaying of Burgess Road.
- 4. Installation of junction boxes and conduit for future signal at the intersection of Burgess/Day Roads.
- 5. Perform additional and incidental work as called for by the specifications and plans.

APPLICABLE SPECIFICATIONS

The Specification that is applicable to the Work on this Project is the 2018 edition of the "Oregon Standard Specifications for Construction."

All number references in these Special Provisions shall be understood to refer to the Sections and subsections of the Standard Specifications and Supplemental Specifications bearing like numbers and to Sections and subsections contained in these Special Provisions in their entirety.

Copies of the Oregon Standard Specifications may be purchased or viewed online at

http://www.oregon.gov/ODOT/Business/Pages/Standard Specifications.aspx.

APPLICABLE RULES

The rules applicable to this contract are the Attorney General's Model Public Contract Rules, Chapter 137-046 and Chapter 137-049, as presently constituted and Deschutes County Code (DCC) Chapter 2.37. The provisions of DCC Chapter 2.37.150 are incorporated herein by reference. These provisions may be viewed at the following web address:

http://www.co.deschutes.or.us/administration/page/deschutes-county-code

CONTRACT TIME

The Contractor shall complete all Work to be done under the Contract not later than December 31, 2018.

CLASS OF WORK

The Class of Work for this Project is Earthwork and Drainage.

SECTION 00110 - ORGANIZATION, CONVENTIONS, ABBREVIATIONS AND DEFINITIONS

Comply with Section 00110 of the Standard Specifications modified as follows:

00110.20 Definitions - Replace the definitions of the words and phrases list below with the following definitions :

Agency – County of Deschutes

Bid Booklet - The version that can be accessed and printed from the Deschutes County Bids and RFPs website, which contains the information identified in 00120.10.

Engineer - The Road Department Director of Deschutes County acting either directly or through his authorized representatives.

SECTION 00120 - BIDDING REQUIREMENTS AND PROCEDURES

Comply with Section 00120 of the Standard Specifications modified as follows:

00120.00 Prequalification of Bidders – Replace the last paragraph with the following:

Deschutes County Road Department will regularly evaluate the performance of Contractors on its projects for purposes of responding to reference checks, future prequalification and determinations of responsibility.

00120.01 General Bidding Requirements - Replace this subsection with the following:

Bidders shall submit bids by paper.

The standard prequalification forms furnished by the ODOT Procurement Office shall be used by the bidder to file authorized signatures with Deschutes County Road Department. Signatures are of personnel authorized to submit Bids, modify Bids, or withdraw Bids.

00120.05 Request for Solicitation Documents – Replace this subsection with the following:

Bidders shall obtain solicitation documents from the Deschutes County Bids and RFPs website:

https://www.deschutes.org/rfps

Each request shall include both the name of the person ordering or obtaining the Solicitation Documents, and the name of the Entity intending to use them. The Agency will add the name of the Entity intending to use the Solicitation Documents to the list of Holders of Bidding Plans. Bidders are cautioned that only Solicitation Documents obtained properly from the Deschutes County website may be used to submit Bids.

Only paper Bids will be accepted.

Copies of the Oregon Standard Specifications may be purchased or viewed online at

http://www.oregon.gov/ODOT/Business/Pages/Standard Specifications.aspx.

The Plans, which are applicable to the Work to be performed under the Contract, bear title and date as follows:

BURGESS RD/DAY RD INTERSECTION IMPROVEMENT PROJECT

DESCHUTES COUNTY APRIL, 2018

00120.10 Bid Booklet – Replace this subsection with the following:

The Bidding Documents Booklet may include, but is not limited to:

- Cover Page
- Index
- Invitation to Bid
- Information for Bidders
- Bid Proposal Form
- Schedule of Bid Items
- Subcontractor Disclosure Form
- Bid Guaranty Form
- Contract Form (for review only)
- Payment and Performance Bond Forms (for review only)

Depending on the Class of Project, other certificates or statements may be bound within the Bidding Documents Booklet. Plans, specifications, and other documents referred to in the Bidding Documents Booklet will be considered part of the Bid.

00120.30 Changes to Plans, Specifications, or Quantities before Opening of Bids – Replace the first paragraph with the following:

The Agency reserves the right to issue Addenda making changes or corrections to the Plans, Specifications, or quantities. The Agency will provide Addenda only by publishing them on the Agency's web site at:

https://www.deschutes.org/rfps

00120.40(a) (2) Electronic Bids – Delete this subsection.

00120.40(c) (2) Electronic Bid Schedule Entries – Delete this subsection.

00120.40 (d) Bidder's Address and Signature Pages – Replace this subsection with the following:

Bidders shall include in the Bid the address to which all communication concerning the Bid and Contract should be sent. The Bid shall be signed by a duly authorized representative of the Bidder.

00120.40(e) (2) Bid Guaranty with Electronic Bids – Delete this subsection.

00120.40(f)Disclosure of First-Tier Subcontractors – Under the paragraph "The Subcontractor Disclosure Form may be submitted for a paper Bid either," replace the second bulleted item with the following:

 By removing it from the paper Bid Booklet, filling it out and submitting it separately to the Deschutes County Public Works Engineering and Construction Division at the address given in the Bid Booklet.

Delete the third bulleted item.

Delete the paragraph which begins "The Subcontractor Disclosure Form may be submitted for an electronic Bid either:"

Replace the paragraph that begins "Subcontractor Disclosure forms submitted by..." with the following:

Subcontractor Disclosure Forms submitted by any method will be considered late if not received by the Agency within two working hours of the time designated for receiving Bids.

00120.45 Submittal of Bids – Replace this subsection with the following:

Bids shall be submitted in the manner and prior to the time listed in the Bidding Documents Booklet. Bids may be submitted by mail, parcel delivery service, or hand delivery. Bids submitted after the time set for receiving Bids will not be opened or considered. The Agency assumes no responsibility for the receipt and return of late Bids.

00120.50 Submitting Bids for More than One Contract – Delete this subsection.

00120.60(a) Paper Bids – Replace all references to "ODOT Procurement Office" with "Agency."

Delete the third bullet point.

00120.60(b) Electronic Bids – Delete this subsection.

00120.70 Rejection of Nonresponsive Bids – Add the following bullet to the end of the bullet list:

 The Agency determines that any Pay Item is significantly unbalanced to the potential detriment of the Agency.

00120.95 Opportunity for Cooperative Arrangement – Delete this subsection.

SECTION 00130 – AWARD AND EXECUTION

Comply with Section 00130 of the Standard Specifications modified as follows:

00130.10 Award of Contract – Replace the paragraph that begins "The Agency will provide Notice of Intent..." with the following:

The Agency will provide Notice of Intent to Award on the Agency's website:

https://www.deschutes.org/rfps

Delete the paragraph that begins "The Award will not be final until..."

00130.15 Right to Protest Award – Replace this subsection with the following:

Adversely affected or aggrieved Bidders, limited to the three apparent lowest Bidders and any other Bidder directly in line for Contract Award, may submit to the Board of County Commissioners of Deschutes County a written protest of the Agency's intent to Award within five working days following the Bid Opening. The protest shall specify the grounds upon which it is based.

The Agency is not obligated to consider late protests.

00130.50 Execution of Contract and Bonds:

- (a) By the Bidder In the sentence that begins "The successful Bidder..." replace "ODOT Procurement Office Construction" with "Agency" and replace "15 Calendar Days" with "the requested amount of time".
- **(b) By the Agency** In the sentence that begins "Within 7 Calendar Days..." replace "7" with "21 (twenty-one)".

SECTION 00140 - SCOPE OF WORK

Comply with Section 00140 of the Standard Specifications.

SECTION 00150 - CONTROL OF WORK

Comply with Section 00150 of the Standard Specifications modified as follows:

00150.05 Cooperative Arrangements – Replace this subsection with the following:

Agency is not, by virtue of this Contract, a partner or joint venturer with Contractor in connection with activities carried out under this Contract, and shall have no obligation with respect to Contractor's debts or any other liabilities of each and every nature.

Add the following subsection:

00150.50(f) Utility Information:

The following organizations may be adjusting Utilities within the limits of the Project during the period of the Contract with relocation Work estimated to be completed by the following dates (times): The Contractor shall contact the Engineer to view the approved Utility Relocation Plan:

Utility

Estimated Completion Date (Time)

1. MidState Electric "Power Company" Mellissa Byrd mbyrd@mse.coop (541) 536-7236

6/29/2018

Energized power lines overhang portions of the Work with a minimum vertical clearance of 18 feet. The Contractor shall maintain at least 10 feet of safety clearance. Exceptions require written approval from the MidState Electric and may require an On Site safety watcher, at no cost to the Contractor. The Contractor shall provide the Engineer a copy of the written approval of exception before beginning work.

The Contractor shall notify, in writing, MidState Electric, with a copy to the Engineer, at least 28 Calendar Days before beginning Work on the Project.

Utility

Estimated Completion Date (Time)

2. Bend Broadband "Telecommunications Company" Branden Chenoweth Branden.Chenoweth@tdstelecom.com, (541) 693-5984

6/29/2018

The Contractor shall notify, in writing, Bend Broadband, with a copy to the Engineer, at least 28 Calendar Days before beginning work within 10 feet of communication lines.

Utility

Estimated Completion Date (Time)

3. Century Link "Telecommunications Company" Stephen Coker Stephen.Coker@centurylink.com (541) 385-0296

6/29/2018

The Contractor shall notify, in writing, Century link, with a copy to the Engineer, at least 28 Calendar Days before beginning work within 10 feet of communication lines.

SECTION 00160 - SOURCE OF MATERIALS

Comply with Section 00160 of the Standard Specifications modified as follows:

00160.30 Agency-Furnished Materials – Add the following paragraph:

No Agency materials are being offered for use on this project. Contractor shall provide all required materials.

00160.40 Agency-Furnished Sources– Add the following paragraph:

No Agency sources are being offered for use on this project. Contractor shall provide all required materials.

SECTION 00165 - QUALITY OF MATERIALS

Comply with Section 00165 of the Standard Specifications modified as follows:

00165.03 Testing by Agency – Delete this subsection.

00165.04 Costs of Testing – Delete this subsection.

00165.50(b)(1) Specification Materials – Delete the second sentence.

00165.10(a) Field-Tested Materials – Add the following sentence to the end of this subsection:

This is a Type D project.

SECTION 00170 - LEGAL RELATIONS AND RESPONSIBILITIES

Comply with Section 00170 of the Standard Specifications modified as follows:

Add the following subsection:

00170.09 Debt Limitation - This Contract is expressly subject to the debt limitation of Oregon counties set forth in Article XI, Section 10, of the Oregon Constitution, and is contingent upon funds being appropriated therefore. Any provision herein which would conflict with law are deemed inoperative to that extent.

00170.70(a) Insurance Coverages - Add the following paragraph and table to the end of this subsection:

The following insurance coverages and dollar amounts are required pursuant to this subsection:

Insurance	Combined Single Limit	Annual Aggregate
Coverages	per Occurrence	Limit
Commercial General Liability	\$1,000,000	\$2,000,000
Commercial Automobile Liability	/ \$1,000,000	(aggregate limit not required)

00170.70(c) Additional Insured - Add the following paragraph and bullets to the end of this subsection:

Add the following as Additional Insureds under the Contract:

- Deschutes County and its officers, agents, employees, and volunteers
- Deschutes County Board of Commissioners

00170.72 Indemnity/Hold Harmless - Add the following paragraph and bullets to the end of this subsection:

Extend indemnity and hold harmless to the Agency and the following:

- Deschutes County and its officers, agents, and employees
- Deschutes County Board of Commissioners

SECTION 00180 – PROSECUTION AND PROGRESS

Comply with Section 00180 of the Standard Specifications modified as follows:

00180.40(c) Specific Limitations - Limitations of operations specified in these Special Provisions include, but are not limited to, the following:

Limitations	Subsection
Cooperation with Utilities	00150.50
Contract Completion Time	00180.50(h)
Traffic Lane Restrictions	00220.40(e)

Be aware of and subject to schedule limitations in the Standard Specifications that are not listed in this subsection.

00180.41 Project Work Schedules - After the paragraph that begins "One of the following Type..." add the following paragraph:

In addition to the "look ahead" Project Work schedule, a Type A schedule as detailed in the Standard Specifications is required on this Contract.

00180.50(h) Contract Time - The Contractor shall complete all Work to be done under the Contract not later than December 31, 2018.

SECTION 00190 - MEASUREMENT OF PAY QUANTITIES

Comply with Section 00190 of the Standard Specifications.

SECTION 00195 - PAYMENT

Comply with Section 00195 of the Standard Specifications modified as follows:

00195.12(d) Steel Materials Pay Item Selection - Add the following to this subsection:

No Pay Items under this Contract qualify for the steel escalation/de-escalation program for this Project.

00195.50(c-1) Cash, Alternate A - In the paragraph that begins "The Agency will...", replace the sentence that begins "The Agency will deposit..." with the following sentence:

The Agency will deposit the cash retainage withheld in an interest-bearing account in a bank, savings bank, trust company, or savings association for the benefit of the Agency, as provided by ORS 279C.560(5).

00195.50(c-2) Cash, Alternate B (Retainage Surety Bond) - Delete this subsection.

00195.50(c-3) Bonds and Securities – Delete this subsection.

00195.50(d) Release of Retainage – Replace this subsection with the following:

As the Work progresses, release of the amounts retained under (b) above will only be considered for Pay Items that have been satisfactorily completed. For purposes of this Subsection, a Pay Item will be considered satisfactorily completed only if all of the Work for the Pay Item is complete and all contractual requirements pertaining to the Pay Item and Work have been satisfied. Work not included in a Pay Item, or which constitutes part of an uncompleted Pay Item, will not be regarded as satisfactorily completed Work for the purposes of this Subsection.

A determination of satisfactory completion of Pay Items or Work or release of retainage shall not be construed as acceptance or approval of the Work and shall not relieve the Contractor of responsibility for defective Materials or workmanship or for latent defects and warranty obligations.

SECTION 00196 – PAYMENT FOR EXTRA WORK

Comply with Section 00196 of the Standard Specifications.

SECTION 00197 – PAYMENT FOR FORCE ACCOUNT WORK

Comply with Section 00197 of the Standard Specifications.

SECTION 00199 - DISAGREEMENTS, PROTESTS, AND CLAIMS

Comply with Section 00199 of the Standard Specifications modified as follows:

00199.40 Claim Decision; Review; Exhaustion of Administrative Remedies – Replace the second and third paragraphs with the following:

If the Engineer denies the claim for additional compensation or a combination of additional compensation and Contract Time, in full or in part, according to 00199.40(a), the Contractor may request review of the denial. The disputed claim may then be resolved, in full or in part, at any of the three progressive steps of claim review procedure as set forth in (b) through (d) of this Subsection.

If the Engineer has denied a claim, in full or in part, for Contract Time only according to 00180.80, or has denied a claim, in full or in part, for correction of final compensation according to 00195.95, those disputed claims may then be resolved, in full or in part, at any of the three progressive steps of claim review procedure as specified in (b) through (d) of this Subsection.

Delete the fifth paragraph.

00199.40(b-e) - Replace these subsections in their entirety with the following:

00199.40(b) Step 1: Board of Commissioners Review – The Contractor shall request that the Engineer arrange for a hearing during a regularly scheduled Board of Commissioners Meeting in order to present the denied or partially denied claim for formal review and discussion. The meeting will take place within 21 Calendar Days of the Agency's receipt of the request, or as otherwise agreed by the parties.

If the Board of Commissioners determines that the Contractor must furnish additional information or documentation to allow proper analysis of the claim, the Engineer will prepare a Board meeting agenda item for a second hearing within 14 Calendar Days, or as otherwise agreed by the parties, at which the Contractor shall present the requested information or documentation.

If the Contractor does not accept the Step 1 decision, the Contractor may, within 10 Calendar Days of receipt of the written decision, request in writing through the Engineer that the claim be advanced to Step 3 or 4 (see (c) and (d) below.

00199(c) Step 2: Arbitration - At this step, the claim will be resolved by binding arbitration before a single arbitrator according to the Construction Industry Arbitration Rules of the American Arbitration Association or such other arbitration service and rules as agreed by the parties.

Arbitration filing costs and any arbitrator's fees will be divided equally between the Agency and the Contractor.

00199(d) Step 3: Litigation – This step applies to appeals of arbitration awards issued in Step 2 at 00199.40(c) above, according to ORS 36.600 through ORS 36.740.

The Contractor must follow each step in order, and exhaust all available administrative remedies before resorting to litigation. Lawsuits must be properly filed in a court of competent jurisdiction within 6 months from the date of the final decision that exhausted the Contractor's available administrative remedies under this Section 00199.

The Contractor shall comply with 00170.00.

SECTION 00210 - MOBILIZATION

Comply with Section 00210 of the Standard Specifications.

SECTION 00220 - ACCOMMODATIONS FOR PUBLIC TRAFFIC

Comply with Section 00220 of the Standard Specifications modified as follows:

00220.40(e-1) Closed Lanes - Replace this subsection, except for the subsection number and title, with the following:

One Traffic Lane may be closed when allowed, shown, or directed during the following periods of time except as indicated in 00220.40(e)(2):

Daily, Monday through Friday between 7:00 a.m. and 6:00 p.m.

Night lane closures may be conducted upon approval by the Engineer.

Pine Forest Drive between Burgess Road and Elderberry Lane may be closed to all traffic for one continuous 5 calendar day period.

Day Road between Burgess Road and Cascade Lane may be closed to all traffic for one continuous 7 calendar day period.

SECTION 00225 - WORK ZONE TRAFFIC CONTROL

Comply with Section 00225 of the Standard Specifications.

SECTION 00290 - ENVIRONMENTAL PROTECTION

Comply with Section 00290 of the Standard Specifications.

SECTION 00305 - CONSTRUCTION SURVEY WORK

Section 00305, which is not a Standard Specification, is included for this Project by Special Provision.

Description

00305.00 Scope - Provide construction survey work according to the current edition on the date of Advertisement, of the ODOT "Construction Surveying Manual for Contractors". This manual is available on the web at:

http://www.oregon.gov/ODOT/HWY/GEOMETRONICS/Pages/documents.aspx

Measurement

00305.80 Measurement - No measurement of quantities will be made for construction survey work.

Payment

00305.90 Payment - The accepted quantities of construction survey work will be paid for at the Contract lump sum amount for the item "Construction Survey Work".

Payment will be payment in full for furnishing all material, equipment, labor, and incidentals necessary to complete the work as specified.

No separate or additional payment will be made for any temporary protection and direction of traffic measures including flaggers and signing necessary for the performance of the construction survey work.

No separate or additional payment will be made for preparing surveying documents including but not limited to office time, preparing and checking survey notes, and all other related preparation work.

Costs incurred caused by survey errors will be at no additional cost to the Agency. Repair any damage to the Work caused by Contractor's survey errors at no additional cost to the Agency. The Engineer may make an equitable adjustment, which may decrease the Contract Amount, if the required survey work is not performed.

SECTION 00310 - REMOVAL OF STRUCTURES AND OBSTRUCTIONS

Comply with Section 00310 of the Standard Specifications modified as follows:

00310.80 Measurement - Add the following to the end of the length and area bullet:

Asphalt pavement cutting will be the length of the actual cut based on a depth of 6 inches. If the depth is greater than 6 inches, the length will be adjusted by converting to an equivalent number of feet on a proportionate length basis.

00310.91 Lump Sum Basis – Replace the sentence that begins "Item (a) includes…" with the following:

Item (a) includes all removal work specified on the plans unless specifically covered under another bid item, including those given in 00310.92. The estimated items to be removed include:

A................

	item	Quantity	
I	Fence	575 LF	
00310.92	Separate Item Basis - Add the following	g pay item to the pay	item list:
(g)Aspha	It Pavement Saw Cutting		Foot

14----

Add the following paragraph to the end of this subsection:

Item (g) applies to asphalt pavement saw cutting when shown.

SECTION 00320 - CLEARING AND GRUBBING

Comply with Section 00320 of the Standard Specifications.

SECTION 00330 - EARTHWORK

Comply with Section 00330 of the Standard Specifications modified as follows:

00330.03 Basis of Performance - Add the following paragraph to the end of this subsection:

Perform all earthwork under this Section on the excavation basis.

00330.41(a-5) Waste Materials - Replace this subsection, except for the subsection number and title, with the following:

Unless otherwise specifically allowed and subject to the requirements of 00280.03, dispose of materials, classed as waste materials in 00330.41(a-3), outside and beyond the limits of the Project and Agency controlled property according to 00290.20. Do not dispose of materials on wetlands, either public or private, or within 300 feet of rivers or streams.

00330.41 Excavations – add the following to the end of the section

Rock may be encountered and shall be included in the general excavation bid item. No separate payment will be made for rock excavation.

00330.81 Excavation Basis of Measurement – Add the following:

The pay quantity for "General Excavation" was determined by a topographic survey and computer generated surface model. The pay quantities for "General Excavation" will be limited to the neat lines of specified typical sections, lines, grades, and slopes and above ground or base elevations at the time excavation construction begins. The pay quantities WILL NOT include additional quantities required due to work outside of the neat lines (unless specified). If at any time during the construction the contractor feels that this is not an accurate representation of the actual excavation, he shall notify the County immediately of the possible discrepancy and it shall be his responsibility to provide measurements and documentation (including earthwork modeling) to the satisfaction of the Engineer to justify a change in the plan quantities. The cost of this analysis will be considered incidental and no separate payment shall be made. The proposed DTM used in the design will be made available to the successful bidder after award of the contract.

Estimated Project in Place Quantities
Excavation 2,762 CY

Embankment 423 CY

SECTION 00440 - COMMERCIAL GRADE CONCRETE

Comply with Section 00440 of the Standard Specifications modified as follows:

00440.13 Field-Mixed Concrete - Add the following paragraph to the end of this subsection:

Pre-packaged dry blended concrete from the QPL may be used for work items listed in 00440.14(a).

SECTION 00620 - COLD PLANE PAVEMENT REMOVAL

Comply with Section 00620 of the Standard Specifications modified as follows:

00620.40(a) General - Replace this subsection, except for the subsection number and title, with the following:

Remove the existing pavement to the depth, width, grade and cross section shown or as directed. The use of a heating device to soften the pavement is not allowed.

SECTION 00641 - AGGREGATE SUBBASE, BASE, AND SHOULDERS

Comply with Section 00641 of the Standard Specifications.

SECTION 00730 - EMULSIFIED ASPHALT TACK COAT

Comply with Section 00730 of the Standard Specifications modified as follows:

00730.90 Payment - Replace this subsection, except for the subsection number and title, with the following:

No separate or additional payment will be made for emulsified asphalt tack coat. Approximately 1.7 tons of emulsified asphalt in tack coat will be required on this Project.

SECTION 00744 - ASPHALT CONCRETE PAVEMENT

Comply with Section 00744 of the Standard Specifications modified as follows:

00744.11(a) Asphalt Cement - Add the following to the end of this subsection:

Provide PG 58-34 grade asphalt cement for this Project.

Add the following subsection:

00744.51 Opening Sections to Traffic - Schedule work so that, during the same shift, the surfaces being paved are paved full width and length through the top base course before opening to traffic. Traffic will be allowed on the top base course up to 15 Calendar Days.

Before beginning wearing course paving operations, make repairs to the existing surface as directed. Payment for the repairs will be made according to 00195.20.

SECTION 00749 - MISCELLANEOUS ASPHALT CONCRETE STRUCTURES

Comply with Section 00749 of the Standard Specifications modified as follows:

00749.44 Placing Asphalt Concrete - Replace the paragraph that begins "Construct all structures within..." and the bullet list with the following paragraph and bullet list:

Construct all structures within the following lines and grades:

- 0.08 foot of true line
- 0.04 foot of established surface grade, cross section and slope
- 0.04 foot of specified thickness

00749.91 Method "A" - Weight and Extras Basis - Replace the paragraph that begins "Item (a) includes road..." with the following paragraph:

Item (a) includes road approaches, street connections, alley approaches, driveways, guardrail flares, non-flared guardrail terminals, and mailbox turnouts.

SECTION 00850 - COMMON PROVISIONS FOR PAVEMENT MARKINGS

Comply with Section 00850 of the Standard Specifications.

SECTION 00860 - LONGITUDINAL PAVEMENT MARKINGS - PAINT

Comply with Section 00860 of the Standard Specifications.

SECTION 00867 - TRANSVERSE PAVEMENT MARKINGS - LEGENDS AND BARS

Comply with Section 00867 of the Standard Specifications modified as follows.

00867.45 Installation - Replace the paragraph that begins "Minimum initial retroreflectivity..." with the following paragraph and bullets:

Minimum initial retroreflectivity shall conform to the following:

- White 250 mcd/m²/lx
- Yellow 200 mcd/m²/lx

SECTION 00920 - SIGN SUPPORT FOOTINGS

Comply with Section 00920 of the Standard Specifications modified as follows:

00920.80 Measurement - Add the following to the end of this subsection:

The estimated quantities of concrete for minor sign supports are:

Support Type	Material	Quantity
PSST Anchor Foundation	Concrete	1.3 cu. yd.

SECTION 00930 - METAL SIGN SUPPORTS

Comply with Section 00930 of the Standard Specifications modified as follows:

00930.10 Materials - Replace the paragraph that begins "Except for perforated steel square tube..." with the following paragraph:

Except for perforated steel square tube slip base sign supports and for perforated steel square tube anchor sign supports, galvanizing shall conform to the requirements of Section 02530. Galvanize perforated steel square tube slip base sign supports and perforated steel square tube anchor sign supports according to ASTM A653 G90, zinc coat corner seam weld after scarfing, apply a conversion coating, and apply a final clear polymer coating.

00930.40(c) Welding - Replace the paragraph that begins "AWS D1.1, Clause 3..." with the following bullets:

- AWS D1.1, Clause 3 prequalified welds for complete joint penetration (CJP) are not allowed.
- Qualify CJP welds according to AWS D1.1, Clause 4. Perform V-notch (CVN) testing at 70 °F meeting the requirements of the absorbed energy values of Table 4.14.

00930.40(d-2-a) Direct Tension Indicator Tightening - Replace this subsection, except for the subsection number and title, with the following:

Install new and unused direct tension indicator washers at each bolt. Install so that the direct tension indicator protrusions are in contact with a hardened washer.

Bring the connection to a snug-tight condition. Snug-tight is defined as the condition when all plies of the connection are in firm contact and can be attained by applying the full effort of a worker on the end of a 12 inch long wrench to each bolt in the connection. Tighten

all fasteners in the connection by progressing systematically from the most rigid part of the connection to the free edges in a manner that will minimize relaxation of previously tightened fasteners. In some cases, proper tensioning of the bolts may require more than a single cycle of systematic partial tightening.

After attaining a snug-tight condition, tighten all fasteners in the connection by progressing systematically from the most rigid part of the connection to the free edges until all of the spaces between the direct tension indicator protrusions refuse entry to a 0.005 inch feeler gauge.

00930.40(e-2) Direct Tension Indicator Method - Replace this subsection, except for the subsection number and title, with the following:

Provide the Engineer full opportunity to witness installation of bolted connections. The Engineer will periodically observe the installation and tightening operations to ensure that proper procedures are being adhered to.

Upon completion of a bolted joint, the Engineer will determine that all bolts have been tightened. A minimum of 10 percent, but not less than two bolts in each joint, will be inspected. The joint will be accepted as properly tightened when all spaces between the direct tension indicator protrusions refuse entry to a 0.005 inch feeler gauge. If there are any spaces between the direct tension indicator protrusions that do not refuse entry to a 0.005 inch feeler gauge, re-inspect all bolts, retighten bolts in the joint as required, and resubmit the joint for inspection.

00930.80 Measurement - Add the following to the end of this subsection:

The estimated quantities of structural steel are as follows:

Item
PSST Posts

Estimated Quantity (Pound) 405

SECTION 00940 - SIGNS

Comply with Section 00940 of the Standard Specifications.

SECTION 00990 - TRAFFIC SIGNALS

Comply with Section 00990 of the Standard Specifications modified as follows:

00990.00 Scope – Add the following to the end of the section:

This work includes the furnishing and installation of the junction boxes and PVC conduit for the installation of a future traffic signal at the intersection of Burgess/Day Roads.

00990.80 Measurement – Add the following to the end of the section

00990.90 Payment - Replace pay item (a) with the following pay item:

(a) Traffic Signal Installation, _____ Lump Sum

Replace the paragraph that begins "Item (a) includes furnishing...": with the following:

In item (a), the intersection location will be inserted in the blank. Item (a) includes furnishing and installing junction boxes and PVC conduit.

SECTION 01012 - STORMWATER CONTROL, WATER QUALITY SWALE

Section 01012, which is not a Standard Specification, is included for this Project by Special Provision.

Description

01012.00 Scope - This work consists of furnishing and installing a water quality swale as shown.

Materials

01012.10 Water Quality Mixture - Furnish medium compost meeting the requirements of Section 03020. Furnish soil meeting the following gradation requirements:

Sieve Size	Percent Passing (by Weight)	
No. 4	100	
No 10	95 - 100	
No. 40	40 - 60	
No. 100	10 - 25	
No. 200	5 - 10	

Sample soil according to AASHTO T 2. Determine sieve analysis according to AASHTO T 27 and AASHTO T 11.

Blend the medium compost and soil so that the mixture:

- Is composed of between 20 percent and 25 percent medium compost material and between 75 percent and 80 percent soil material.
- Has a pH between 5.5 and 8.0.
- Does not have clumps greater than 3 inches in any direction.

01012.11 Round River Rock - Furnish round river rock with a maximum size of 6" and minimum size of 2".

Construction

01012.40 General - Construct water quality swale facility as shown. Perform excavation, fine grading, and placement work only when the facility area is dry and only from the top of the swale area. Do not stockpile excavated material in the facility area. Scarify the subsoil area a minimum 12 inches deep. After scarification, place the water quality mixture in maximum 12 inch lifts. Compact each lift with a water filled landscape roller. Place round river rock in maximum 6" lifts. Compact each lift with water filled landscape roller.

Maintenance

01012.70 Cleaning - If a stormwater control facility is used for erosion and sediment control, remove all accumulated sediment and debris before completing the facility.

Measurement

01012.80 Measurement - No measurement of quantities will be made for work performed under this Section. The estimated quantities of materials are:

Water Quality Swale Quantities:

Item	Quantity
Water Quality Mixture	80 Cu. Yd.
Round River Rock	26 Cu. Yd.

Payment

01012.90 Payment - The accepted quantities of work performed under this Section will be paid for at the Contract lump sum amount for the item "Water Quality Swale".

Payment will be payment in full for furnishing and placing all materials, and for furnishing all equipment, labor, and incidentals necessary to complete the work as specified.

SECTION 01014 - STORMWATER CONTROL, WATER QUALITY FILTER STRIP

Section 01014, which is not a Standard Specification, is included for this Project by Special Provision.

Description

01014.00 Scope - This work consists of furnishing and installing a water quality filter strip as shown.

Materials

01014.10 Water Quality Mixture - Furnish medium compost meeting the requirements of Section 03020. Furnish soil meeting the following gradation requirements:

Sieve Size	Percent Passing (by Weight)	
No. 4	100	
No 10	95 - 100	
No. 40	40 - 60	
No. 100	10 - 25	
No. 200	5 - 10	

Sample soil according to AASHTO T 2. Determine sieve analysis according to AASHTO T 27 and AASHTO T 11.

Blend the medium compost and soil so that the mixture:

- Is composed of between 20 percent and 25 percent medium compost material and between 75 percent and 80 percent soil material.
- Has a pH between 5.5 and 8.0.
- Does not have clumps greater than 3 inches in any direction.

Construction

01014.40 General - Construct water quality filter strip facility as shown. Perform excavation, fine grading, and placement work only when the facility area is dry and only from the perimeter of the filter strip area. Do not stockpile excavated material in the facility area. Scarify the subsoil area a minimum 12 inches deep. After scarification, place the water quality mixture in maximum 12 inch lifts. Compact each lift with a water filled landscape roller.

Maintenance

01014.70 Cleaning - If a stormwater control facility is used for erosion and sediment control, remove all accumulated sediment and debris before completing the facility.

Measurement

01014.80 Measurement - No measurement of quantities will be made for work performed under this Section. The estimated quantities of materials are:

Filter Strip Quantities:

Item	Quantity
Water Quality Mixture	520 Cu. Yd.

Payment

01014.90 Payment - The accepted quantities of work performed under this Section will be paid for at the Contract lump sum amount for the item "Water Quality Filter Strip".

Payment will be payment in full for furnishing and placing all materials, and for furnishing all equipment, labor, and incidentals necessary to complete the work as specified.

SECTION 01070 - MAILBOX SUPPORTS

Comply with Section 01070 of the Standard Specifications.

SECTION 02010 - PORTLAND CEMENT

Comply with Section 02010 of the Standard Specifications modified as follows:

02010.10(b) Specifications - Replace this subsection, except the subsection number and title, with the following:

Portland cement shall conform to the requirements of AASHTO M 85 or ASTM C150 for low alkali cement except as follows:

- Cement shall have a total alkali content (sodium and potassium oxide calculated as Na₂O + 0.658 K₂O) not exceeding 0.60 percent.
- All cement types shall contain a maximum of 8 percent tricalcium aluminate(C₃A).
- The time-of-setting tests will be by either the Gillmore test or the Vicat test.
- Types I and II maximum fineness (specific surface) as determined by AASHTO T153 air permeability test shall be 430 m²/kg. If C₃S + 4.75 C₃A is less than or equal to 90, the fineness criteria does not apply.

02010.20 Blended Hydraulic Cement - Replace this subsection, except for the subsection number and title, with the following:

Blended hydraulic cement shall be either Type IS-portland blast-furnace slag cement, Type IP-portland-pozzolan cement, Type IL-portland-limestone cement, or Type IT-ternary blended cement according to AASHTO M 240.

Furnish blended hydraulic cement from the QPL.

SECTION 02050 - CURING MATERIALS

Comply with Section 02050 of the Standard Specifications modified as follows:

02050.00 Scope - Replace this subsection, except for the subsection number and title, with the following:

This Section includes the requirements for liquid compounds, polyethylene films, and curing blankets used to cover concrete and other surfaces to retain moisture and to cure.

02050.10 Liquid Compounds - Replace this subsection, except for the subsection number and title, with the following:

Furnish liquid membrane-forming curing compounds from the QPL and meeting the requirements of ASTM C309, except that testing will be done according to ODOT TM 721.

All compounds shall be Type 1-D or Type 2, Class A or B.

Only Type 2, Class B resins will be allowed for the following concrete pavement applications:

- Plain concrete pavement repair.
- Continuously reinforced concrete pavement.
- · Plain concrete pavement.
- Reinforced concrete pavement repair.

Before using liquid compounds, submit one quart samples of each lot for testing, except samples are not required for commercial grade concrete.

02050.40 Liquid Evaporation Reducer Compounds - Delete this subsection.

SECTION 02630 – BASE AGGREGATE

Comply with Section 02630 of the Standard Specifications modified as follows:

SECTION 02640 - SHOULDER AGGREGATE

Comply with Section 02640 of the Standard Specifications.

SECTION 02910 - SIGN MATERIALS

Comply with Section 02910 of the Standard Specifications modified as follows:

02910.02 Types of Signs - Replace this subsection, except for the subsection number and title, with the following:

Traffic signs are classified by sign type as follows:

- "B" Blue Type III or Type IV sheeting background with silver-white Type III or Type IV permanent or removable legend, or silver-white Type III or Type IV sheeting overlaid with blue electronically cuttable film background with legend cut out.
- **"B2"** Blue Type III or Type IV sheeting background with white Type IX removable legend.

- **"B3"** White Type IX sheeting overlaid with blue electronically cuttable film background with legend cut out.
- "B4" Blue Type III or Type IV sheeting background with yellow Type III or Type IV permanent legend, or yellow Type III or Type IV sheeting overlaid with blue electronically cuttable film with legend cut out or blue transparent paste background with retroreflective yellow screened legend or yellow Type III or Type IV permanent legend (County Route Shield).
- "C" Brown Type III or Type IV sheeting background with silver-white Type III or Type IV permanent or removable legend, or silver-white Type III or Type IV sheeting overlaid with brown electronically cuttable film background with legend cut out.
- **"C1"** Brown Type III or Type IV sheeting background with white Type IX removable legend.
- **"C2"** White Type IX sheeting overlaid with brown electronically cuttable film background with legend cut out.
- "F" Silver-white Type III or Type IV sheeting background overlaid with red and blue electronically cuttable film with legend cut out or red and blue transparent paste background with retroreflective silver-white screened legend or silver-white Type III or Type IV permanent legend.
- **"F1"** White Type IX sheeting background overlaid with red and blue electronically cuttable film with legend cut out or red and blue transparent paste background with white Type IX permanent legend.
- "G" Green Type III or Type IV sheeting background with silver-white Type III or Type IV permanent or removable legend, or silver-white Type III or Type IV sheeting overlaid with green electronically cuttable film background with legend cut out.
- **"G1"** Green Type III or Type IV sheeting background with white Type IX removable legend.
- **"G2"** White Type IX sheeting overlaid with green electronically cuttable film background with legend cut out.
- "G5" Green Type III or Type IV sheeting background with white Type IX permanent legend and symbol, or white Type IX sheeting overlaid with green electronically cuttable film background with legend cut out and white Type IX symbol (Combination Lane-use / Destination Overhead Guide Sign).
- **"OO"** Orange Type III or Type IV sheeting background with black nonreflective permanent or removable legend.
- "O3" Fluorescent orange Type VIII or Type IX sheeting background with black nonreflective permanent legend and red retroreflective symbol (Stop or Yield Ahead Symbol Sign).

- **"04"** Fluorescent orange Type VIII or Type IX sheeting background with black nonreflective permanent legend.
- **"05"** Fluorescent orange Type VIII or Type IX sheeting background with black nonreflective removable legend.
- "O6" Fluorescent orange Type VIII or Type IX sheeting background with black nonreflective permanent legend and red, yellow, and green Type VIII and Type IX circles. (Signal Ahead Symbol Sign)
- "O8" Fluorescent orange Type VIII or Type IX sheeting background with black nonreflective screened or cut-out permanent legend and silver-white Type VIII or Type IX symbol. (Speed Reduction Symbol Sign)
- "R" Silver-white Type III or Type IV sheeting background overlaid with red transparent paste background with silver-white Type III or Type IV permanent legend or red electronically cuttable film with legend cut out. (Stop Sign, Wrong Way, Do Not Enter.)
- **"R1"** White Type IX sheeting background overlaid with red transparent paste background with white Type IX permanent legend or red electronically cuttable film with legend cut out.
- "R2" Silver-white Type III or Type IV sheeting background overlaid with red electronically cuttable film with legend and triangle cut out or screened red transparent paste triangle and legend or red Type III or Type IV triangle and permanent legend. (Yield Sign)
- "R3" White Type IX sheeting background overlaid with red electronically cuttable film with legend and triangle cut out or screened red transparent paste triangle and permanent legend.
- "R4" Rubber STOP flap made of natural rubber with a red background and white lettering.
- "R5" Red Type III or Type IV sheeting background overlaid with black nonreflective screened or cut-out permanent legend (OM4-2 Object Marker).
- **"W1"** Silver-white Type III or Type IV sheeting background with black nonreflective screened, cut out permanent or removable legend.
- **"W2"** Silver-white Type III or Type IV sheeting background with a screened black nonreflective legend overlaid with a screened red transparent paste circle and continuous diagonal bar. (Prohibition)
- **"W3"** Silver-white Type III or Type IV sheeting background with transparent brown screened legend or brown Type III or Type IV cut-out permanent legend.
- **"W4"** Silver-white Type III or Type IV sheeting background with transparent red screened legend or red Type III or Type IV cut-out permanent legend.

- **"W5"** Silver-white Type III or Type IV sheeting background with transparent green screened legend or green Type III or Type IV cut-out permanent legend.
- **"W6"** White Type IX sheeting background with a screened or cut-out black nonreflective legend overlaid with a screened red transparent paste circle and continuous diagonal bar. (Prohibition sign overhead)
- **"W7"** White Type IX sheeting background with black nonreflective screened or cutout permanent legend.
- **"W8"** Silver-white Type III or Type IV sheeting background with blue transparent screened legend or blue Type III or Type IV cut-out permanent legend.
- **"W9"** Silver-white Type III or Type IV sheeting background with blue nonreflective screened or cut-out permanent legend.
- **"W10"** White Type IX sheeting background with black nonreflective removable legend.
- **"W11"** Silver-white Type III or Type IV sheeting background with black nonreflective screened or cut out permanent legend with red Type III or Type IV symbol.
- **"W12"** Silver white Type III or Type IV sheeting background with transparent green screened legend or green Type III or Type IV cut out permanent legend with blue Type III or Type IV symbol.
- **"W13"** Silver white Type III or Type IV sheeting background with red Type III or Type IV screened or cut-out permanent legend and black nonreflective screened or cut-out permanent legend overlaid with a red transparent paste circle and continuous diagonal bar (Parking Prohibition Symbol Signs).
- **"W14"** Silver white Type III or Type IV sheeting background with black nonreflective screened or cut-out permanent legend overlaid with a green transparent paste circle (Permissive Trucks and Hazardous Material Symbol Signs).
- "W15" Silver white Type III or Type IV sheeting background with green Type III or Type IV screened or cut-out permanent legend and black nonreflective screened or cut-out permanent legend overlaid with a green transparent paste circle (Permissive Parking Symbol Signs).
- "W16" Agency supplied silver-white Type III or Type IV sheeting decal, with multicolored Oregon State Parks logo, direct applied to sheet aluminum or HDO plywood substrate (Oregon State Parks shield).
- "W17" Silver-white Type III or Type IV sheeting background overlaid with brown transparent paste or electronically cuttable film background, and silver-white Type III or Type IV sheeting background with yellow transparent paste or electronically cuttable film background and black non-reflective screened or cutout permanent legend and logo (Oregon Trail or California Trail Route Markers). Digital files of the logo graphics may be available on the ODOT Sign Design Information website at:

http://www.oregon.gov/ODOT/HWY/TS/Pages/signing.aspx

- "W18" Silver-white Type III or Type IV sheeting background overlaid with blue transparent paste background with retroreflective silver-white screened legend or blue electronically cuttable film with legend cut out, and silver-white Type III or Type IV sheeting background with black non-reflective screened or cut-out permanent legend and multi-colored Scenic Byway logo Oregon Scenic Byway Signs). Digital files of the logo graphics may be available on the ODOT Sign Design Information website at:
 - http://www.oregon.gov/ODOT/HWY/TS/Pages/signing.aspx
- "W19" Silver-white Type III or Type IV sheeting background with plum transparent screened legend or plum Type III or Type IV cut-out permanent legend and multi-colored Tour Route logo (Oregon Tour Route Signs). Digital files of the logo graphics may be available on the ODOT Sign Design Information website
 - http://www.oregon.gov/ODOT/HWY/TS/Pages/signing.aspx
- "Y1" Yellow Type III or Type IV sheeting background with black nonreflective screened, cut out permanent or removable legend.
- "Y2" Yellow Type III or Type IV sheeting background with a screened or cut-out black nonreflective legend and red and green Type III or Type IV circles. The center yellow circle part shall be part of the background sheeting. (Signal Ahead Symbol Sign)
- "Y3" Yellow Type IX sheeting background with black nonreflective screened, cut-out permanent or removable legend.
- "Y4" Yellow Type III or Type IV sheeting background with black nonreflective screened or cut out permanent legend and red Type III or Type IV symbol. (Stop or Yield Ahead Symbol Sign)
- "Y5" Fluorescent yellow Type IX sheeting background with black nonreflective screened, cut out permanent or removable legend.
- "Y6" Fluorescent yellow Type IX sheeting background with black nonreflective screened or cut out permanent legend and red and green Type IX circles. The center yellow circle shall be part of the background sheeting. (Signal Ahead Symbol Sign overhead)
- "Y7" Fluorescent yellow Type IX sheeting background with black nonreflective screened or cut out permanent legend and red Type IX symbol. (Stop or Yield Ahead Symbol Sign)
- "Y8" Yellow Type III or Type IV sheeting background with black nonreflective screened or cut out permanent legend and silver-white Type III or Type IV symbol. (Speed Reduction Symbol Sign)
- "YG" Fluorescent yellow-green Type IX sheeting background with black nonreflective legend or cut out permanent legend.

- **"YG1"** Fluorescent yellow-green Type IX sheeting background with black nonreflective screened or cut out permanent legend and red Type IX symbols (School Bus Stop Ahead Symbol Sign).
- "YG2" Fluorescent yellow-green Type IX sheeting background with black nonreflective screened or cut out permanent legend and fluorescent yellow-green and white Type IX symbol (Reduced School Speed Limit Ahead Symbol Sign).
- "YGW" Fluorescent yellow-green Type IX sheeting background with black nonreflective screened or cut out permanent legend and silver-white Type III or Type IV sheeting background with black nonreflective screened or cut-out permanent legend and red Type III or Type IV symbol. (In Street Pedestrian Crossing Symbol Sign).
- "YGW1" Fluorescent yellow-green Type IX sheeting background with black nonreflective screened or cut-out permanent legend, and silver-white Type III or Type IV sheeting background with black nonreflective screened or cut-out permanent legend (School / Speed Limit 20 Combination Sign).
- "YW" Yellow Type III or Type IV sheeting background with black nonreflective screened or cut-out permanent legend, and white Type III or Type IV sheeting background with black nonreflective screened or cut-out permanent legend and red Type III or Type IV symbol.
- **"YW1"** Yellow Type III or Type IV sheeting background with black nonreflective screened or cut-out permanent legend, and white Type III or Type IV sheeting background with black nonreflective screened or cut-out permanent legend.
- "YW2" Yellow Type IX sheeting background with black nonreflective screened or cutout permanent legend, and white Type IX sheeting background with black nonreflective screened or cut-out permanent legend and red Type IX symbol.

02910.33(d) Nonreflective Black Screened Legend - Replace this subsection, except for the subsection number and title, with the following:

Furnish material for nonreflective black screened legends that is compatible with the sign sheeting, as recommended by the sign sheeting manufacturer.